

Research Highlights

Bacterial Nanometric Amorphous Fe-Based Oxide: Potential of Lithium-Ion Battery Anode Material

Leptothrix ochracea is a species of iron-oxidizing bacteria that exists in natural hydrospheres where groundwater outwells worldwide. Intriguingly, the bacterium produces Fe^{3+} -based amorphous oxide particles (ca 3 nm diameter; $\text{Fe}^{3+}:\text{Si}^{4+}:\text{P}^{5+} \sim 73:22:5$) that readily assemble into microtubular sheaths encompassing the bacterial cell (ca 1 μm diameter, ca 2 mm length, Fig. 1). The mass of such sheaths (named *L-BIOX* : Biogenous Iron Oxide produced by *Leptothrix*) has been usually regarded as useless waste, but Jun Takada and colleagues at Okayama University discovered unexpected industrial functions of *L-BIOX* such as a great potential as an anode material in lithium-ion battery.

Since use of the battery that is a powerful electric source for portable electric devices has expanded to a variety of new areas such as transportation and electric power storage, improvement of battery capability and effort to develop new electrode materials have been demanded. The general processes of nanosizing and appropriate surface modification which are required for tuning the battery property are complicated and cost-ineffective. By contrast, *L-BIOX* is a cost-effective and easily-handled electrode material, since its basic texture is composed of nanometric particles.

The charge-discharge properties of simple *L-BIOX*/Li-metal cells were examined at current rates of 33.3mA/g (0.05C) and 666mA/g (1C) for voltages of 0 to 3V over 50 cycles (Fig. 2). In addition, electronic and structural changes were microscopically analyzed by TEM/STEM/EELS and ^{57}Fe Mössbauer spectroscopy.

Results showed that *L-BIOX* exhibited a high potential as an $\text{Fe}^{3+}/\text{Fe}^0$ conversion anode material. Its capacity was significantly higher than the conventional carbon materials. Notably, the presence of minor components of Si and P in the original *L-BIOX* nanometric particles resulted in specific and well-defined electrode architecture. Since Fe-based electrochemical center is embedded in Si/P-based amorphous texture, an undesirable coagulation of Fe-based center is prevented.

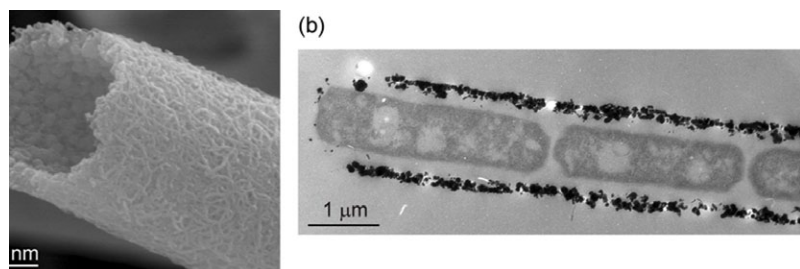


Figure 1. (a) High-magnification SEM image of *L-BIOX*. (b) TEM image showing a early stage of the formation of *L-BIOX* around rod-like bacterial cells lined up head to tail.

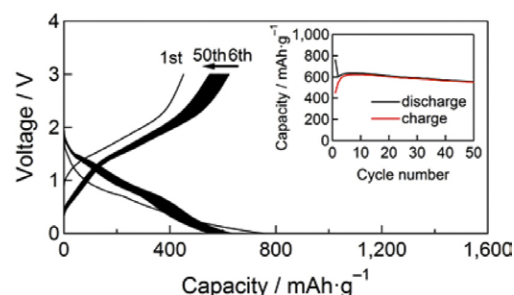


Figure 2. Charge-discharge curves at 666 mA/g between 0 and 3.0 V. Inset shows the cycle-life performance.

Takada and colleagues proposed a unique approach to develop new electrode materials for Li-ion battery. This is an example showing that the iron oxides of bacterial origin are an unexplored frontier in solid-state chemistry and materials science.

Reference:

- Authors: Hideki Hashimoto, Genki Kobayashi, Ryo Sakuma, Tatsuo Fujii, Naoaki Hayashi, Tomoko Suzuki, Ryoji Kanno, Mikio Takano, and Jun Takada
- Title of original paper: Bacterial Nanometric Amorphous Fe-Based Oxide; A Potential Lithium-Ion Battery Anode Material
- Journal, volume, pages and year: ACS Appl. Mater. Interfaces, 6(8), 5374–5378, 2014.
- Digital Object Identifier (DOI): 10.1021/am500905y
- Affiliation: Graduate School of Natural Science and Technology, Okayama University, JST CREST